




# Waveguide Pressurisation Equipment

As the European Telecom industry increasingly standardizes upon ETSI standards, Drallim introduces a new, high-capacity dehydrator for location in both ETSI and standard 19" racks. Reversible mounting brackets allows the same unit to fit within either enclosure without any further need for mounting brackets or plates.

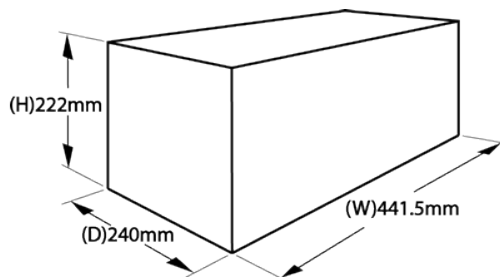

Whether you choose the 230vAC or the 48vDC variant, the 12446 boasts an impressive output of over 220 litres per hour at an excellent dewpoint of  $-40^{\circ}\text{C}$ . The unit comes with 2 fixed output pressure options of either 15 or 40 mbar, and 6 off  $\frac{1}{4}$ " pneumatic outlets as standard.

Despite its physical dimensions, the 12446 houses a high capacity, high pressure air storage vessel which allows the unit to remain inactive for long periods of time, keeping maintenance requirements to an absolute minimum.

Dry Air Delivery	Output Pressure	Dry Air Dewpoint	No. of Outlets	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Operating Voltage
226l/hr (8ft <sup>3</sup> /hr)	15 mbar or 40mbar	$-40^{\circ}\text{C}$	6	222	441.5	240	14.5	230v AC & 48v DC

**Drallim Industries Limited**  
Millwood House, Drury Lane,  
Ponswood Industrial Estate,  
St.Leonards on Sea,  
East Sussex. TN38 9BA, UK

**t** +44 (0)1424 205140  
**f** +44 (0)1424 202140  
**e** email@drallim.com  
**w** www.drallim.com

An ISO 9001:2008 Approved Company  
Registered Office: Registered in England No 606278

**12446  
19" & ETSI RACK  
MOUNTING  
DEHYDRATOR**

**The Drallim Group**

Leading innovators in technology and quality