




# Series 1500 & 4500 Control Valves



**Panel mounted**  
1500 Control  
4500 Metering





**Stud mounted**  
1510 Control  
4510 Metering



**Barb Adaptors**  
TC271 3/16in Tube  
TC273 1/4in Tube

Drallim miniature valves are also suitable for soft plastic tubing using special barb spigot adaptors.

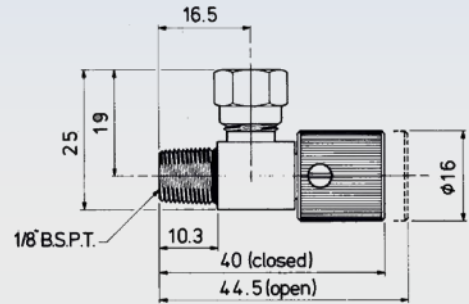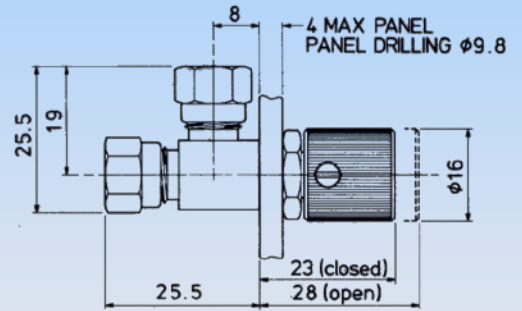

Technical Data	
<b>Fluids</b>	Air and other gases, vapours and liquids compatible with the materials of construction.
<b>Pressures</b>	-1 to +10 bar
<b>Temperatures</b>	-15 to +60°C, dependant on o-ring and tube seal materials.
<b>Materials</b>	Bodies - Brass Stems - 1500 Delrin 4500 316 stainless steel Metering orifice – P.T.F.E Springs - Stainless steel

Ordering Code	
<b>Connector Size</b>	
<b>Tube OD</b>	
1/8in	<b>R</b>
3/16in	<b>A</b>
1/4in	<b>B</b>
4mm	<b>004</b>
5mm	<b>005</b>
6mm	<b>006</b>
<b>O-Ring Material</b>	
Nitrile	<b>NE</b>
Viton	<b>VN</b>
<b>Type Designation</b>	
<b>Control</b>	
Panel	<b>1500</b>
Stud	<b>1510</b>
<b>Metering</b>	
Panel	<b>4500</b>
Stud	<b>4510</b>
EXAMPLE <b>1500 NE B</b>	