

## POB series

# Coil Tester & Power Supply Units

- Lightweight - only 10,60 kg
- Powerful – up to 40 A
- Voltage 10 V to 300 V DC
- Voltage 10 V to 250 V AC
- Output protection
- Fully automatic operation



### Powerful DC and AC power supply for a circuit breaker test

The Coil Tester & Power Supply POB series is a powerful tool for testing circuit breakers, where the substation battery is not connected or available. It operates the circuit breaker coils and spring charging motors as a part of commissioning and maintenance testing.

The POB series generates true DC (ripple free) or AC voltage and can also be used to test a minimum trip voltage of the circuit breaker coils. The output voltage is selectable from 10 V to 300 V DC or from 10 V to 250 V AC.

This device is a powerful and a versatile unit which, at 230 V mains supply, is capable of generating on its Motor output the initial current of 40 A as well as the continuous DC currents as presented in Table 1. In Table 2 are presented the AC currents that can be generated on the Coils outputs.

The set is equipped with thermal and over-current protection. The POB series is easy to use and has the accessory cable-set with touch-proof contacts. Thanks to a proprietary hardware and software solution, it is capable of canceling electrostatic and electromagnetic interference in HV electric fields.

Mains Voltage	Load Voltage	Max Current	Max load interval
230 V	110 V DC	30 A 24 A 12 A	20 sec 60 sec continuous
	220 V DC	15 A 12 A 8 A	20 sec 60 sec continuous
115 V	110 V DC	15 A 12 A 8 A	20 sec 60 sec continuous
	220 V DC	8 A 6 A 5 A	20 sec 60 sec continuous

Table 1

Mains Voltage	Load Voltage	Max Current	Max load interval
230 V	110 V AC	15 A 10 A	10 sec continuous
	220 V AC	12 A 6 A	10 sec continuous
115 V	110 V AC	12 A 8 A	10 sec continuous
	220 V AC	8 A 5 A	10 sec continuous

Table 2

## Application

The POB series is used in switchyards, power and industrial environment, in manufacturing, in commissioning and as well in maintenance of the circuit breakers for:

- operating circuit breakers
- supplying spring-charging motors
- power supply at test with breaker analyzers
- minimum trip voltage-test of the circuit breaker's coils

The POB series has a built-in capability to perform automatic test of minimum trip voltage. The minimum trip voltage test is described in a number of international and national standards such as IEC 62271-100, ANSI C37.09 etc. Performing tests and acquiring of many other important parameters are possible with circuit breaker analyzers.


The POB series is then used as a power supply unit. It is compatible with breaker analyzers from different vendors. The POB series can also be used as a general power supply unit or temporary battery charger.

## Automatic testing of the minimum trip voltage of a breaker

Procedure steps:

1. The circuit breaker mains terminals have to be de-energized and safety grounded on both sides and the auxiliary (control) circuit as well. The local safety regulations should be followed.
2. Connect the Power supply unit POB series to the breaker's coil circuit.
3. Set the minimum test voltage.
4. Set the step voltage.
5. Set the maximum voltage.
6. Press the TRIG key

## Connecting the POB series to a test object

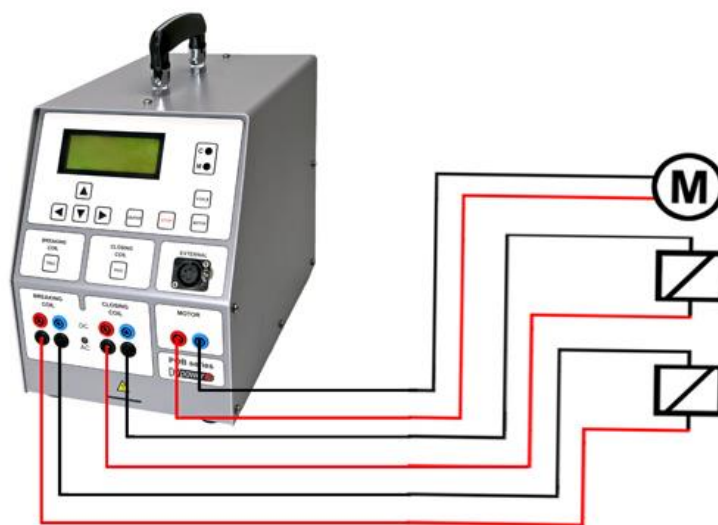

## Technical Data

### Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Voltage 90 V – 264 V AC, 50/60 Hz, Single phase
- Power consumption 4000 VA

### Output data

- Coils output DC Voltage 10 V to 300 V DC (varies for different device models)
- Coils output AC Voltage 10 V to 250 V AC (varies for different device models); 50/60 Hz; true RMS
- Motor output DC Voltage 10 V to 250 V DC
- Output current max 40 A (varies for different device models)

### Measurement

- Voltage 10 V – 300 V DC or 10 V – 250 V AC
- Current 1 A – 50 A
- Accuracy  $\pm (0,25\% \text{ rdg} + 0,25\% \text{ FS})$

### Environment conditions

- Operating temperature  $-10^{\circ}\text{C}$  -  $+55^{\circ}\text{C}$  / 14 F – 131 F
- Storage and transportation  $-40^{\circ}\text{C}$  -  $+70^{\circ}\text{C}$  / -40 F – 158 F

- Humidity  
Maximum relative humidity 95%, non-condensing

### Dimensions and Weight

- Dimensions (W x H x D) without handle  
205 mm x 287 mm x 410 mm  
8,1 in x 11,3 in x 16,14 in
- Weight 10,60 kg / 23.37 lbs

### Mechanical protection

- IP 43

### Warranty

- Three years

### Safety Standards

- Low Voltage Directive:
- Directive 2014/35/EU (CE conform).
- Applicable standards, for a class I instrument, pollution degree 2,
- Installation category II: IEC EN 61010-1

### Electromagnetic Compatibility (EMC)

- Directive 2014/30/EU (CE conform).
- Applicable standard: EN 61326-1

All specifications herein are valid at ambient temperature of + 25 °C and recommended accessories. Specifications are subject to change without notice.


## Accessories



Transport case




Cable set




External Trigger cable

## POB series – models


### POB30AD

	<p>Generates 10 V to 300 V DC and 10 V to 250 V AC on coils outputs.</p> <p>Motor output range selectable from 10 V to 250 V DC.</p> <p>Max output current 30 A.</p>
---	--


### POB30D

	<p>Generates 10 V to 300 V DC on coils outputs.</p> <p>Motor output range selectable from 10 V to 250 V DC.</p> <p>Max output current 30 A.</p> <p>No AC voltage available.</p> <p>No external trigger connector available.</p>
---	---


### POB40ADL

	<p>Generates 1 V to 50 V DC and 1 V to 40 V AC on coils outputs.</p> <p>Motor output range selectable from 1 V to 50 V DC.</p> <p>Max output current 40 A.</p>
---	--


### POB40D

	<p>Generates 10 V to 300 V DC on coils outputs.</p> <p>Motor output range selectable from 10 V to 250 V DC.</p> <p>Max output current 40 A.</p> <p>No AC voltage available.</p> <p>No external trigger connector available.</p>
---	---

### POB40DL

	<p>Generates 1 V to 50 V DC on coils outputs.</p> <p>Motor output range selectable from 1 V to 50 V DC.</p> <p>Max output current 40 A.</p>
---	---

### POB40AD

	<p>Generates 10 V to 300 V DC and 10 V to 250 V AC on coils outputs.</p> <p>Motor output range selectable from 10 V to 250 V DC.</p> <p>Max output current 40 A.</p>
---	--

### Order info:

Instrument	Art.No.
Coil Tester & Power Supply POB40AD	POB40AD-N-00
Coil Tester & Power Supply POB30AD	POB30AD-N-00
Coil Tester & Power Supply POB30D	POB30AC-N-00
Coil Tester & Power Supply POB40ADL	POB40AD-N-01
Coil Tester & Power Supply POB40D	POB40AC-N-00
Coil Tester & Power Supply POB40DL	POB40AC-N-01

Included accessories
Ground cable
Power supply cable

Recommended accessories	Art.No.
Cable set 6 x 2 m 2,5 mm <sup>2</sup>	C6-02-02BPBP
Transport case	HARD-CASE-ME

Optional Accessories	Art.No.
Cable set 6 x 5 m 2,5 mm <sup>2</sup>	C6-05-02BPBP
Device bag	DEVIC-BAG-00
Cable bag	CABLE-BAG-00
External Trigger cable set 2 m	TC-02-04MCBP
Coil supply cable set 2 x 2 m 2,5 mm <sup>2</sup> with banana plugs	C2-02-02BPBP

**IBEKO Power AB**  
 Stockholmsvägen 18  
 181 50 Lidingö, Sweden

**Contact**  
 Phone: +46 70 0925 000  
 E-mail: [sales@dv-power.com](mailto:sales@dv-power.com)