

MC2/QEC-SL Slimline Aircraft Tie-down



MC2/QEC-SL Slimline Aircraft Tie-down 12,000lb (Ultimate)

The Drallim Group Leading innovators in technology and quality

Drallim Industries Limited | Millwood House | Drury Lane | St. Leonards-on-Sea | East Sussex | TN38 9BA | Tel: +44(0)1424 205140 Email: sales@drallim.com | Web: www.drallim.com

Rev 02



- The MC2/QEC-SL offers aircraft deck handlers a lighter more slender lashing for medium to heavy lift aircraft platforms in the MTOW: 4-10t class where previously the more bulky MC2 Tie-down may have been used.
- The polyester webbing tie-down has a fast single action, over centre lashing mechanism that tensions and locks in one movement.
- Quick release is also achieved in one easy action. The MC2/QEC-SL (Slimline) has a unique clutch allowing slack to be taken up without reloading the mechanism.
- The webbing is treated to resist abrasion and the effects of sunlight. The mechanical components are of replaceable corrosion resistant steel selected to give maximum durability.
- The polyester webbing has a useful extended life up to 10 years (5 years in storage plus 5 years in-use) and can be replaced as part of an overhaul routine thereby reducing in-service costs.
- Hook end fitting specifically designed and profiled to fit Deck fitting for RNOV Al Naasir (S12) High Speed Support Vessel (HSSV). Also available in the standard MC2 end fitting, details on request.

Part Number:

Design Load | LC:

Webbing Width:

Surface Finish:

Material:

Ultimate Load | BF min:

Securing Point to Point:

Working Temperature:

Nato Stock Number:

Weight with 6 mtr Webbing:

12,000LB Ultimate Load


The MC2/QEC-SL aircraft tie-down is designed for loads up to 8000 lbs and is capable of an ultimate load of 12,000 lbs (5,443 Kg).

Easy Load Quick Release

The MC2/QEC-SL Aircraft tie-down features a fast single action over-centre mechanism that gives tension and locking in one easy movement.

Application

The MC2/QEC-SL has been designed to secure on deck the latest generation of medium/super lift aircraft in the MTOW: 4-10t class (as part of A/C lashing kit)

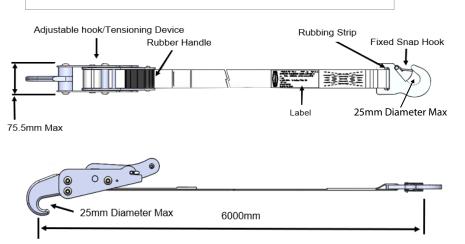



Specification

8,000 lb (3,629 kg)

12,000 lb (5,443 kg)

45mm (18,000lbs rated)

236CA24

3.61 kg

6000mm

Stainless Steel

Std: Natural

-15°C and +40°C

1730-99-4072966

Deck Link Fitting/ Bracket



An AS9100D & BS EN9001: 2015 Approved Company Registered Office: Registered in England No. 606278