




Cable Pressurisation Equipment



This very high performance unit stands over 2.2m high, and is home to two 3/4HP compressors. Using timers and pressure switches, the compressors are controlled to run alternately when the demand for air is within the capability of one.

When one compressor is not enough to fill the receiver faster than the cable is drawing it off, then a switch triggers both to run simultaneously.

With both compressors running, the unit is capable of producing in excess of 185 cubic feet per hour at 9 psi. This is regulated and split between up to 80 outlets each with its own flowmeter for a visual indication of each cables demand for air.

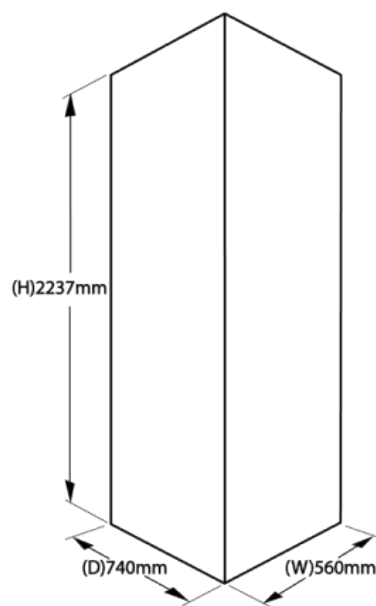

Dry Air Delivery	Output Pressure	Dry Air Dewpoint	No. of Outlets	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)	Operating Voltage
180 ft ³ /hr	0.5 - 15psi	-40°C	Up to 80	1848/2240	560	780	200	230v AC

Drallim Industries Limited
 Millwood House, Drury Lane,
 Ponswood Industrial Estate,
 St.Leonards on Sea,
 East Sussex. TN38 9BA, UK

t +44 (0)1424 205140
f +44 (0)1424 202140
e email@drallim.com
w www.drallim.com

An ISO 9001:2008 Approved Company
 Registered Office: Registered in England No 606278

**12269
 LARGE TWIN-
 COMPRESSOR
 DEHYDRATOR**

The Drallim Group

Leading innovators in technology and quality