




# Cable Pressurisation Equipment

The 12255 is a unit which stands little more than 1.6m tall, and yet houses the 3/4HP compressor which provides the unit with the ability to produce over 100 cubic foot per hour of air at 9 psi.



In common with all of the current Drallim pressurisation units, the 12255 will dry the output air to a minimum dewpoint of -40°C. The standard humidity detection equipment within the unit ensures that, should a problem occur, any moist air will be exhausted to atmosphere rather than being allowed to enter your cables. Sound-proofing is a standard feature of the 12255 and helps to keep the units' noise to a maximum of 60dBA at 1m. Standard features also include a gauge for the total output pressure and an individual flowmeter for each of up to 40 outputs.

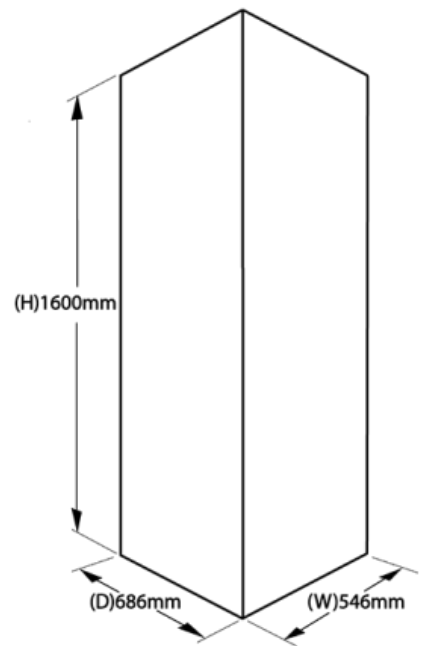

| Dry Air Delivery        | Output Pressure | Dry Air Dewpoint | No. of Outlets | Height (mm) | Width (mm) | Depth (mm) | Weight (kg) | Operating Voltage  |
|-------------------------|-----------------|------------------|----------------|-------------|------------|------------|-------------|--------------------|
| 100 ft <sup>3</sup> /hr | 3 - 15 psi      | -40°C            | Up to 20       | 1600        | 546        | 686        | 190         | 110v AC or 230v AC |

**Drallim Industries Limited**  
 Millwood House, Drury Lane,  
 Ponswood Industrial Estate,  
 St.Leonards on Sea,  
 East Sussex. TN38 9BA, UK

- t** +44 (0)1424 205140
- f** +44 (0)1424 202140
- e** email@drallim.com
- w** www.drallim.com

An ISO 9001:2008 Approved Company  
 Registered Office: Registered in England No 606278

**12255**  
**HIGH OUTPUT**  
**SINGLE COMPRESSOR**  
**DEHYDRATOR**

**The Drallim Group**  
*Leading innovators in technology and quality*